



## Mobile Patient Lifts

2023

These are medical devices.  
Use them according to the user manual or label.  
The information contained in the catalogue is intended  
for healthcare professionals only.

# Your comfort and safety is important to us



Taking care of a person with mobility problems requires a lot of commitment on the part of the caregiver. Looking after an immobilized person, especially when moving or lifting her/him, often is connected with putting physical effort, which can expose the caregiver to muscle strain or spine injuries.

Lifting devices are a great solution for daily care of people with mobility problems making the act of sitting, standing and moving easier. To facilitate everyday care activities, Meden-Inmed produces modern patient lifts – devices which significantly increase the quality of life of end users and make the work of caregivers much easier, devices that are indispensable in nursing homes, hospitals, rehabilitation centers and home conditions.

We offer comprehensive solutions, both with regard to standing support as well as transporting the patient in full suspension. This catalogue is designed to help you choose the right lift model, that will meet the needs of end-users and their caregivers.



Lifteo MLA



Levitop Standard



Levitop Comfort

# Patient Lifts

Mobile patient lifts are intended to lift one person at a time by a caregiver to perform a safe and comfortable lift both for the end-user as the caregiver. They can be used for lifting from / to a wheel chair, a toilet, a bathtub or shower, a stretcher or a bed (even directly from / to the floor) using an appropriate sling.

The devices are used to move people over short distances within a room or within a patient's activity. Only on horizontal flat surfaces and on one floor of the building are allowed to move. If there is a need to transport the end-user on flat, sloping surfaces, an additional personnel is recommended to secure her / him. Lifts can only be used for people whose weight does not exceed the maximum lifting capacity of the lift or slings.

Thanks to the use of high-class Linak batteries, the devices can work for many hours without connection to electricity.

Patient lifts are very useful in hospitals, nursing homes and residential medical care facilities.



VertiUp



VERTEO


Choosing the proper lift can seem like a difficult task, so we will try to make it easier for you. It is important to choose a model that will be appropriate to the individual needs of the end-user and the preferences of the caregiver.

How to select the right lift? What to pay attention to when choosing it?

Below are some of the most important issues.

- **End-user's physical fitness level** - if this person has difficulty getting up from a sitting position on his/her own but can control upper body, then you can choose a sit-to-stand lift. In the case of persons temporarily or permanently deprived of such control, a lift allowing full suspension is recommended.
- **End-user's weight** - has a significant influence on the selection of a lift with a suitable lifting capacity. Incorrect selection poses a risk to user safety as well as the risk of equipment damage. Some of our lifts are adapted to people whose weight doesn't exceed 160 kg (e.g. Lifteo), but our offer also includes VertiUp models, which can be safely used by persons weighing up to 310 kg.
- **Range of mobility** - if the lift is only needed for moving, e.g., from a bed to a wheelchair, then stationary lifts will be sufficient. However, when a greater range of movement within the room or transfer to other rooms is required, then a mobile lift with wheels is recommended.
- **Room size** - for small rooms with narrow door openings, we recommend a lift of small dimensions (more maneuverable). But if the device will be used in spacious rooms where you can easily operate, it is better to choose a larger unit. Such models are most often chosen by caring personnel working in medical facilities, rehabilitation centers and nursing homes.
- **Type of operation (electric, mechanical)** - the electric lift doesn't require the use of force during operation - it is controlled by using the remote control.

# Meden-Inmed's Lifts advantages




**Comfort of movement**  
double front wheels provide excellent lift turning



**Ergonomic grip handles**  
large, easy to grip, facilitate maneuverability



**Comfort use**  
low base and legs span adjustment enables easy approaching to wheelchairs, beds, etc.



**Robust wheels**  
lifts are equipped with wheels of renowned company TENTE; rear wheels with brakes, stop unintentional lift movement, e.g., when end-user is suspended



**Safe to use**  
emergency stop button



**Battery powered**  
battery replacement is quick and easy



**Easy charging**  
with internal charger (standard) or wall-mounted docking station (option)



**Emergency lowering**  
the lever allows for safe, mechanical lowering of the end-user, e.g. in case of a battery discharge



**Easy operating**  
360° hanger bar rotation



**High lift capacity**  
max. patient's weight up to 310 kg



#### Compact dimensions

the lift can be folded down for easy storage



#### Usage safety

hanger bar lock stops unintended movement while patient is suspended



#### Convenient position adjustment

special types of hanger bars equipped with electric actuators



#### Wide lifting range

the possibility of lifting the end-user also from the floor



#### Reliable actuators

the lifts are equipped with actuators of prestigious company Linak (including PatiHoist Plus) in PatiHoist - Jiechang actuator



#### Smooth lifting / lowering

electric actuators provide uniform, shock-free lift arm movement



#### Remote control

easy, intuitive operation via the remote control



#### Adapted to different types of slings

different types of sling attachments extend the range of patient slings types; depending on the weight and size of her / him, the clip sling can be mounted "outside" or "inside"



#### Great stability

the base properly designed to ensure durability and device stability



#### High quality

the lifts are made of steel powder coated elements with great attention to detail



Patient lift

# PatiHoist/PatiHoist Plus\*



## PatiHoist



Mechanical base leg spread



Compatible hanger bar: 2P45 - fixed\*\*, 2-point



Max. safe working load (SWL) - PatiHoist




Max. safe working load (SWL) - PatiHoist Plus\*

## PatiHoist Plus



### Large battery

long operation without recharge



### Small turning radius

useful in smaller rooms



### Compact dimensions

the lift can be folded down for easy storage (PatiHoist)



### Scale (option)

Patient lift **PatiHoist / PatiHoist Plus\*** is easy-to-use, compact, and simple in operation patient lift allowing fully body suspension of an immobilized person. It is perfect for smaller rooms, where the small size of the device and maneuverability are important.

Big advantage of this lift is the possibility of folding it down (only PatiHoist) which makes it easier to store. Relatively low weight and small folded down size also, if necessary, allow it to be packed into the trunk of the car and transported to another, remote place. Large battery allows to perform tens of lifting and lowering cycles without having to recharge.

These lifts can be used in home care, nursing homes, sanatoriums, rehabilitation centers.

\* soon in offer

\*\* hanger bar without possibility of inclination adjustment

# Mobile patient lift Lifteo MLA/ELA



Simple in operation lift, designed for end - users whose weight does not exceed 160 kg.

Mobile patient lift Lifteo is available in two versions:

**Lifteo Type: MLA** - lift with mechanical adjustment of base leg spread and fixed or manual hanger bar.

**Lifteo Type: ELA** - lift with electrical adjustment of base leg spread and with fixed, manual or electric hanger bar.

 **160 KG** Max. safe working load (SWL)

 See more:  
[www.meden.com.pl/link/lifteo](http://www.meden.com.pl/link/lifteo)



The big advantage of Lifteo\* is the possibility of folding it down, which makes it easier to store. The lift is distinguished by a wide range of compatible hanger bars. Large battery allows for making approx. 35 complete lifting and lowering cycles on one charge with a maximum load of 160 kg.



Lifteo  
MLA

Lifteo  
ELA



 **Mechanical base leg spread**

 **Compatible hanger bars:**

- 2P35 – fixed, 2-point, L= 35 cm
- 2P45 – fixed, 2-point, L= 45 cm
- 2P60 – fixed, 2-point, L= 60 cm
- 4PSB – fixed, 4-point
- 4MSB – manual, 4-point


**Scale (option)**



 **Electrical base leg spread**

 **Compatible hanger bars (SWL 160kg):**

- 2P35 – fixed, 2-point, L= 35 cm
- 2P45 – fixed, 2-point, L= 45 cm
- 2P60 - fixed, 2-point, L= 60 cm
- 4PSB - fixed, 4-point
- 4MSB - manual, 4-point

 **Compatible hanger bar (SWL 120kg):**

- 4ESB-S - electric, 4-point

\* only in models with fixed hanger bar, 2-point.

# Mobile patient lift Levitop Standard/Comfort

Patient lift with reinforced construction, adapted to daily care of end-user, whose weight does not exceed 230 kg.

Thanks to its advantages, it is suitable for hospital wards, rehabilitation centers, nursing homes, at home care.

Mobile patient lift Levitop is available in two versions (both with electrical adjustment of the base leg spreading):

**Levitop Type: Standard** – lift with a fixed or manual hanger bar.

**Levitop Type: Comfort** – lift with electric hanger bar.

Large battery allows to perform approx. 20 complete lifting and lowering cycles on one charge (with maximum load of 230 kg).



Max. safe working load (SWL)



4PSB  
Levitop  
Standard



Levitop  
Comfort

4ESB-A



See more:  
[www.meden.com.pl/link/levitopstandard](http://www.meden.com.pl/link/levitopstandard)



Electrical base leg spread



Compatible hanger bars:

- 4PSB - fixed, 4-point
- 4MSB - manual, 4-point



See more:  
[www.meden.com.pl/link/levitopcomfort](http://www.meden.com.pl/link/levitopcomfort)



Electrical base leg spread




Compatible hanger bars:

- 4ESB-A - electric, 4-point



Manual inclination adjustment in the 4MSB hanger bar allows to set the position: lying, half-lying or sitting.



Smooth inclination adjustment of the 4ESB-A hanger bar (via a remote-controlled actuator) allows to set the end-user in the most comfortable position.

Scale (option)





Mobile lift

# VertiUp/VertiUp Plus

This type of lift is designed for vertical lifting (lowering) of end-users with limited mobility. It combines the advantages of an electrically adjustable sling bar with the precision and power of vertical lifting, therefore it has many possibilities and applications. Very large range of arm movement allows easy lifting of the patients from the bathtub, wheelchair and even floor and safely transporting them to the bathroom, toilet or even to a high bed in a comfortable (smoothly adjustable) position. Especially recommended for care of overweight or obese persons (even up to 310 kg).



Available in two versions (both with electrical base legs adjustment):

**VertiUp** - lift designed for end-users whose weight does not exceed 250 kg.

**VertiUp Plus** - lift designed for end-users whose weight does not exceed 310 kg.

Average number of cycles with a complete battery charge: 11.



Recommended for overweight and obese patients



Electrical base leg spread

It is a universal solution for hospitals, rehabilitation centers and nursing homes.



VertiUp



VertiUp Plus



Max. safe working load (SWL)



Compatible hanger bars:

- 4ESB-A - electric, 4-point
- 4ESB-O - electric, 4-point (only up to 250 kg)



Max. safe working load (SWL)



Compatible hanger bar:

- 4ESB-O - electric, 4-point



**Wide lifting range**  
possibility to lift up even from the floor



**End-user comfort**  
smooth adjustment of the optimal position




















**Easy operation**  
via remote control or built-in keyboard



**Weight trend indicator**  
(VertiUp option)

# Comparison of the most important technical data

	PatiHoist	Lifteo		Levitop		VertiUp	VertiUp Plus
		MLA	ELA	Standard	Comfort		
 Base legs spreading:	mechanical	mechanical	electrical	electrical	electrical	electrical	electrical
 Max. safe working load (SWL) [kg]:	160	160	160 (120)*	230	230	250	310
 Length [cm]:	127	128	128	130	130	135	143,3
 Width [cm]:	62	61	61	67	67	68,2	77,9
 Height [cm]:	134	136	136	135	135	min. 188 max. 225	min. 188 max. 225
 Lifting range [cm]:	71 - 192	72 - 194	72 - 194	68 - 196	68 - 196	34,1 - 172,6	32,2 - 170,6
 Min. turning diameter [cm]:	138	140	140	144	144	170	184
 Min. base legs width (int./ext.) [cm]:	45 / 62	49 / 61	49 / 61	52 / 67	52 / 67	53,5 / 68,2	63,7 / 77,9
 Max. base legs width (int./ext.) [cm]:	80 / 94	100 / 112	100 / 112	103 / 118	103 / 118	125,9 / 140,6	143,3 / 152,8
 Base legs height [cm]:	9,5	9,5	9,5	11,5	11,5	11,1	7,3
 Wheels diameter (without / with lock) [cm]:	7,5 / 7,5	7,5 / 10	7,5 / 10	10 / 12,5	10 / 12,5	10 / 12,5	5,0 / 12,5
 Weight [kg]:	39	45	45	61	66	87,7	97,6
 Battery capacity [Ah]:	2,2	2,9	2,9	2,9	2,9	2,9	2,9
 Charger (integrated with control box) [V/Hz]:	110-240 / 50 / 60 (no integrated)	100-240 / 50 / 60	100-240 / 50 / 60	100-240 / 50 / 60	100-240 / 50 / 60	100-240 / 50 / 60	100-240 / 50 / 60
 Remote control functions	<ul style="list-style-type: none"> <li>• up / down</li> <li>• overload indicator</li> <li>• battery charge status</li> </ul>	<ul style="list-style-type: none"> <li>• up / down</li> <li>• battery charge status</li> <li>• service indicator</li> <li>• overload indicator</li> </ul>	<ul style="list-style-type: none"> <li>• up / down</li> <li>• el. leg spread: outside / inside</li> <li>• battery charge status</li> <li>• service indicator</li> <li>• overload indicator</li> </ul>	<ul style="list-style-type: none"> <li>• up / down</li> <li>• el. leg spread: outside / inside</li> <li>• battery charge status</li> <li>• service indicator</li> <li>• overload indicator</li> </ul>	<ul style="list-style-type: none"> <li>• up / down</li> <li>• hanger bar forward / backward tilt</li> <li>• el. leg spread: outside / inside</li> <li>• battery charge status</li> <li>• service indicator</li> <li>• overload indicator</li> </ul>	<ul style="list-style-type: none"> <li>• up / down</li> <li>• hanger bar forward / backward</li> <li>• el. leg spread: outside / inside</li> </ul>	<ul style="list-style-type: none"> <li>• up / down</li> <li>• hanger bar forward / backward</li> <li>• el. leg spread: outside / inside</li> </ul>
 Lifting speed (raising / lowering) [s]:	35 / 23	34 / 33	34 / 33	36 / 34	36 / 34	-	-
 Packed dimensions (LxWxH) [cm]:	140 x 80 x 62	140 x 80 x 62 (with 2-point sling bar) 150 x 80 x 155	140 x 80 x 62 (with 2-point sling bar) 150 x 80 x 155	150 x 80 x 155	150 x 80 x 155	150 x 80 x 200	160 x 80 x 200

\* applies to Lifteo ELA with 4ESB-S hanger bar



## Accessories: Hanger bars


	PatiHoist	Lifteo		Levitop		VertiUp	VertiUp Plus
		MLA	ELA	Standard	Comfort		
 <p><b>2P35</b> fixed (*), 2-point, L= 35 cm for loop slings</p>		✓	✓				
 <p><b>2P45</b> fixed (*), 2-point, L= 45 cm for loop slings</p>	✓	✓	✓				
 <p><b>2P60</b> fixed (*), 2-point, L= 60 cm for loop slings</p>		✓	✓				
 <p><b>4PSB</b> fixed (*), 4-point for loop slings</p>		✓	✓	✓			
 <p><b>4MSB</b> manual (**), 4-point for clip slings</p>		✓	✓	✓			
 <p><b>4ESB-A</b> electric (***), 4-point for clip slings</p>					✓		
 <p><b>4ESB-A (ver. VertiUp)</b> electric (***), 4-point, up to 250 kg, for clip slings</p>						✓	
 <p><b>4ESB-S</b> electric (***), 4-point, up to 120 kg, for clip slings</p>			✓				
 <p><b>4ESB-O</b> electric (***), 4-point, up to 310 kg, for clip slings</p>						✓	✓

\* without possibility of inclination adjustment

\*\* with possibility of inclination adjustment (manual)

\*\*\* with possibility of inclination adjustment (electrical)

## Additional accessories: Slings

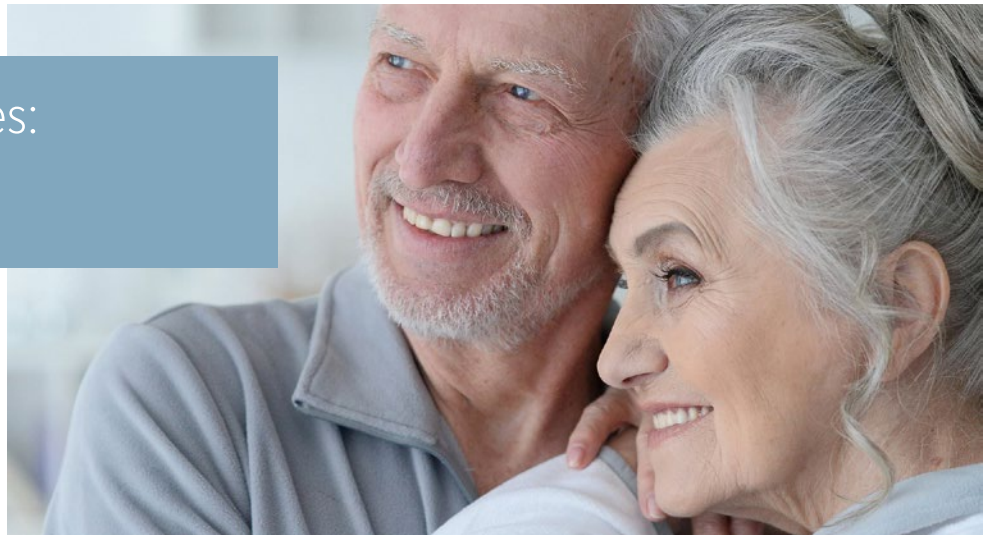

### Full Body Sling:

- head support: yes
- fabric: polyester
- size: M, L, XL,
- load: max. 300 kg (SWL)
- fastening: loops



### Toileting Sling High Net:

- head support: yes
- fabric: polyester net
- size: M, L, XL
- load: max. 300 kg (SWL)
- fastening: loops



### Back Belt E-clip:

- fabric: polyester
- size: M, L
- load: max. 250 kg (SWL)
- fastening: clips



### Full Body Sling E-clip Net:

- head support: yes
- fabric: polyester net
- size: S, M, L
- load: max. 300 kg (SWL)
- fastening: clips.

See other types of slings in our Slings Catalogue



# Sit-to-stand lift Verteo



Electrical base leg spread



Max. safe working load (SWL)




See more:  
[www.meden.com.pl/link/verteo](http://www.meden.com.pl/link/verteo)



Sit-to-stand lift VERTEO is designed for end-user with low core stability, who have difficulty standing up on their own from a seated position and is used to transfer a patient between seated surfaces.

Built to support the upper body part, so requires the ability to support the majority of end-user weight while standing and to control her / his upper body and head. The user is lifted up step by step to upright position, while both feet remain on a secure platform and shanks are placed against special pads. It raises the user to a partial or full standing position.

This type of lift encourages a natural standing / sitting motion and is ideal during everyday activities, e.g. getting up / getting out of bed, getting out of chair, using the toilet, etc. This lift can be used in hospitals, nursing homes, other care facilities.



**Tibial support**  
adjustable; supports patient's legs in the tibial area.



**Solid sling attachment**  
lifting arm with 4 pins for easy clip sling fastening



**Stable footplate**  
comfortable feet support



# Mobile patient lift VertiHelp

VertiHelp is a compact mobile device ideal for people who experience difficulty walking but who can sit and stand with support. It is used to move the end-user from one sitting position to the other, for example, to transfer from or to an armchair, chair, wheelchair, bed or toilet. Makes it easier to move her / him in order to change the dressing, undercoat or during hygiene and care activities.

Used in daily care in nursing homes, hospitals, sanatoriums and in the home environment.

Its small turning radius makes it ideal even for smaller spaces. As non-powered device simplifies everyday transfers.



**2 large handles:**  
for the personnel (assistant) with which the operator maneuvers the device and user handle, with that the end-user holds on to when entering the lift or during transfer



**Knee pad**  
it provides support with raising into half-standing position and also to the patient's legs during the transfer



**Rear castors with lock**  
avoid unintentional movement, e.g. while end-user is sitting down



Mechanical base leg spread



Max. safe working load (SWL)



**Foot lever**  
enables easy base leg spread adjustment which in combination with low footrest allows easy approach wheelchairs, beds, etc.



**Seat parts**  
rotates sideways to make it easier for end-user to get into position

# Comparison of the most important technical data

	Verteo	VertiHelp
 Base legs spreading:	electrical	mechanical
 Max. safe working load (SWL)[kg]:	230	180
 Length [cm]:	108	90,5
 Width [cm]:	75	62
 Height [cm]:	113	102
 Raising range [cm]:	78 - 174	-
 Tibial support (mounted downwards) height (min./max.) [cm]:	39 / 52	-
 Tibial support (mounted upwards) height (min./max.) [cm]:	53 / 66	-
 Knee pad height [cm]:	-	64
 Min. base legs width (int./ext.) [cm]:	51 / 66	49,3 / 61,1
 Max. base legs width (int./ext.) [cm]:	101 / 115	91,8 / 103,6
 Base legs height [cm]:	11,5	8,4
 Castors diameter (without / with lock) [cm]:	10 / 12,5	7,5 / 10
 Weight [kg]:	60	35,5
 Battery capacity [Ah]:	2,9	-
 Min. turning diameter [cm]:	124	110
 Charger (integrated with control box) [V/Hz]:	100-240 / 50 / 60	-
 Remote control functions:	<ul style="list-style-type: none"> <li>• up / down</li> <li>• el. leg spread outside / inside</li> <li>• battery charge status</li> <li>• service indicator</li> <li>• overload indicator</li> </ul>	-
 Packed dimensions (L x W x H) [cm]:	120 x 80 x 135	120 x 80 x 110

Commode / shower chair

# MoHiCan II, MoHiCan II PLUS, MoHiCan II JUNIOR\*



Max. safe working load (SWL)



See more: [www.meden.com.pl/link/mohican](http://www.meden.com.pl/link/mohican)



The commode/shower chair **MoHiCan II, MoHiCan II PLUS, MoHiCan II JUNIOR** is to be used for assistance during moving or performing daily routine activities of persons with physical impairment disabilities. The chair allows the caregiver to adjust both, height and tilt of the seat enabling the end-user to remain in the fixed position for a long time. Made of welded powder-coated stainless steel sections. The device is intended for use in private homes, hospitals, sanatoriums, nursing homes or any other care facilities. The end-user can be moved only through horizontal flat surfaces, and one floor of the building. If you need to transport on flat inclined/tilted surfaces, an additional person is recommended to assist.

Taking advantage of the remote control MoHiCan II allows easily change the height or inclination of the seat (backward tilt, forward tilt). It's easy to maneuver, can be placed even directly above a toilet.

## MoHiCan II PLUS



## MoHiCan II JUNIOR\*

### Additional accessories:



**Toilet bowl**  
easily removable, for hygiene and sanitary purposes



**Torso belt**  
for end-user stabilization



**Leg belt**  
for legs stabilization






Technical data:	MoHiCan II JUNIOR*	MoHiCan II	MoHiCan II PLUS
Max. safe working load (SWL) [kg]:	120	180	250
Length [cm]:	93,5	87	94
Width [cm]:	65,6	67	77
Handles height (min. – max) [cm]:	106 - 128	106 - 128	106 - 128
Lifting range [cm]:	50 - 103	47,6 - 100,5	50 - 105
Seat dimensions [cm]:	33 x 38	43 x 42	55 x 46
Turning diameter [cm]:	110	110	120
Tilt adjustment [°]:	-5 to +26	-5 to +26	-5 to +26
Footboard height [min.]:	11,2	11,2	11,2
Castors diameter [cm]:	12,5	12,5	12,5
Weight [kg]:	50	60	70
Battery capacity [Ah]:	2,9	2,9	2,9
Charger (integrated with control box) [V / Hz]:	100-240 / 50 / 60	100-240 / 50 / 60	100-240 / 50 / 60
Packaged dimensions (L x W x H) [cm]:	105 x 75 x 120	105 x 75 x 120	105 x 90 x 120
Protection level:	control panel, remote control, actuators	IPX6	IPX6
Space between armrests [cm]:	41,4	51,5	60,4
Lifting speed (0 / max.load) [s:]	raising	42 / 49	42 / 49
	lowering	47 / 41	47 / 41



**Tilt and height seat adjustment**  
electrically adjustable for end-user and caregiver comfort



**Armrests**  
comfortable arm support; can be lifted up for easy access to the end-user



**Head support**  
flexible, adjustable for max. comfort of end-user



**Removable battery**  
easy to recharge



**Remote control**  
functions: raising / lowering seat, forward / backward tilt (seat)



**Footboard**  
foldable, adjustable, large foot support

**4 castors with brake**

\* -MoHiCan II JUNIOR buying possibility - ask question

# Bathtub hoist Hydraid

## Hydraid (as seat)



The bathtub hoist Hydraid, with height adjustment, is designed for use in hospitals, sanatoriums and nursing homes. It is used to lift, transfer and bathe person with reduced mobility due to illness or dysfunction, allowing the caregiver to transfer her / him from the bed directly to the bathtub and back again.

It can be operated by one person, which allows for ergonomic work of the personnel.

The Hydraid can be used together with the care bathtub Bathaid.



Max. safe working load (SWL)

### Technical data:

	Dimensions (as seat) (L x W x H (min./max.)) [cm]:	97 x 76 x 124 / 184
	Dimensions (as lying) (L x W x H (min./max.)) [cm]:	97 x 184 x 124 / 184
	Lying top size [cm]:	184 x 43
	Lying top head / leg parts adjustment [°]:	0 / 34 / 62
	Raising / lowering speed [s]:	42 / 35
	Height adjustment (lying / seat top) [cm]:	48 - 106
	Castors diameter (brake / without brake) [cm]:	12,5 / 10
	Power supply [V/Hz]:	100 - 240 / 50 - 60
	Battery capacity [Ah]:	2,9



#### Vertical lifting / lowering

via control panel or manual remote control



Compact, robust design  
(as seat)



#### Lying option

2 special parts attached on standard hoist create 3-part lying top + pillow



Hydraid (as lying) combination of lying top positions to suit any needs;

## Product trainings

Out of concern for our business partners, we have prepared various trainings and presentations about the products from our large offer. In our team we have a person who is responsible for our equipments' trainings, equipment demonstrations at the customers' premises, at exhibitions and congresses.



**Mariusz Rubik**  
Training Consultant  
mrubik@meden.com.pl  
+48 690 266 543



**Mateusz Baranowski**  
Training Consultant  
mbaranowski@meden.com.pl  
+48 663 152 888



## Find us

Check out our social media websites. You will find videos, photos and many useful informations.




## How to order easily

If our catalogue is of interest to you and you want to order any of presented products, please don't hesitate to contact us:




European markets

**Kamilla Modzelewska**  
Vice President  
km@meden.com.pl  
+48 94 344 90 50  
+48 602 668 002



South America, Australia  
Asia and Middle East

**Mariusz Rubik**  
Key account specialist  
mrubik@meden.com.pl  
+48 690 266 543



CIS region, Ukraine,  
Georgia

**Oksana Ardan**  
Key account specialist  
oardan@meden.com.pl  
+48 94 347 10 67  
+48 607 566 302



North/South America, Africa,  
Ireland, GB

**Tomasz Górecki**  
Key Account Manager  
tgorecki@meden.com.pl  
+48 601 646 866

**Meden-Inmed Sp. z o.o.**

ul. Wenedów 2, 75-847 Koszalin, Poland

Phone: +48 94 344 90 50, +48 94 347 10 40

Fax: +48 94 347 10 41

Mobile: +48 602 668 002

e-mail: [international@meden.com.pl](mailto:international@meden.com.pl)

[www.en.meden.com.pl](http://www.en.meden.com.pl)

Battery-powered

Low-base - available for low clearance of special beds

Help in maneuverability - comfortable, large handles, castors

High quality

Manufacturer hereby reserves the right to change design that would not disturb the principal functionality and safety requirements. The colours seen in the catalogue can be differ slightly from the real due to colour printing rendition reasons.